


Thickness (mm)	0.28	Peel Adhesion (N/cm)	7.00
Weight (g/m ²)	480	Operating Temperature (°C)	-73 to +260 °C

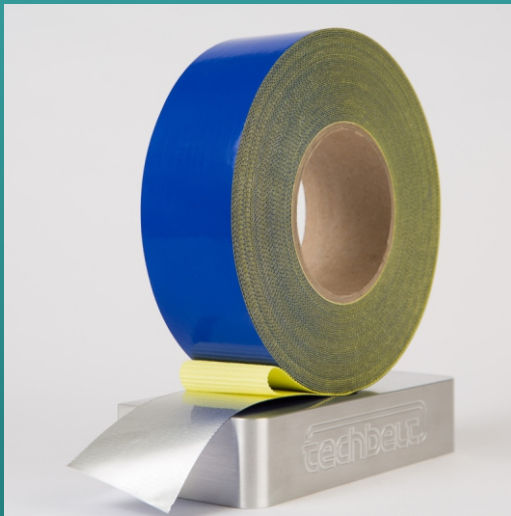

Material Properties

Tefsil 6 metal detectable tape features a PTFE/glass backing with Aluminium foil and a pressure sensitive silicone adhesive cover with yellow protective liner. The PTFE/glass is ideal for non-stick surface applications on heat sealing machines, form seal equipment & blister packaging. Other release applications could be chutes, dead plates or conveyor rails. The Aluminium foil is perfect for being identified by metal detector equipment should the tape become worn or fall from its work surface. A silicone adhesive backing applied to the Aluminium foil allows for reliable bonding to the work area

Additional Information

Availability: This material as available ex stock and can be supplied at any width from 3mm up to 500mm wide.

Fabric Care: Do not fold or crease when handling and installing. The fabric can eventually discolour in sunlight (turns white), but otherwise is unaffected by biological or chemical agents, heat or cold within its temperature range, or by most areas of the electric magnetic spectrum.

The material can be converted to engineered product. Consult our Technical staff for further details. Also available chemically etched one side for proprietary adhesive bonding. Standard etch is silica based, sodium based etch is available on request

PTFE (Teflon®) begins to soften at 260°C, increasing wear rate. Somewhat above 300°C, fumes are given off and these should not be inhaled. COSHH data is available upon request. After contact wash hands thoroughly before handling or smoking tobacco.